


# Coil Test Place SET-AD

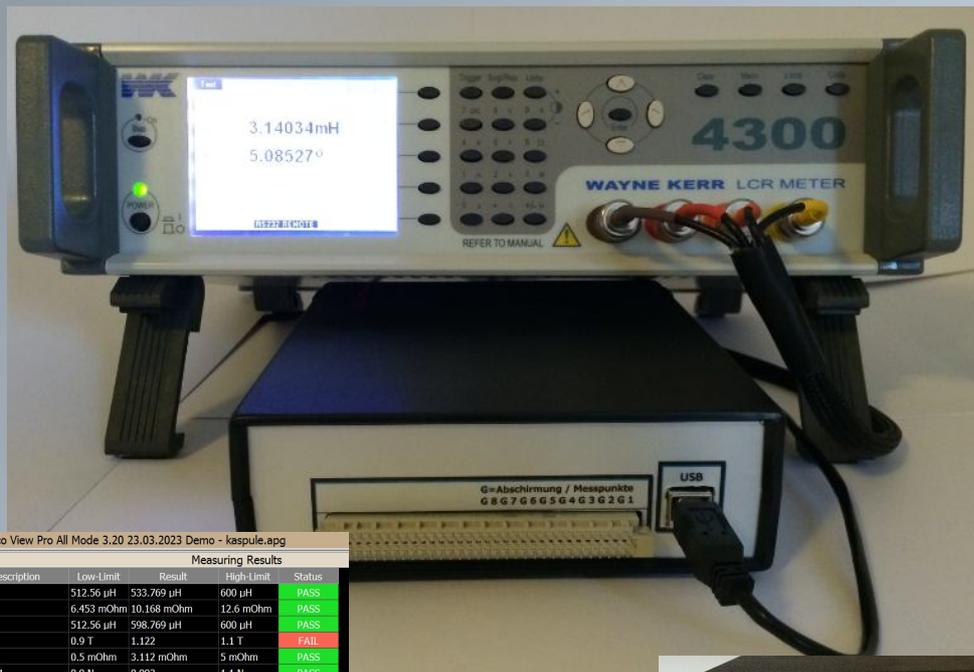

Mesco View Pro All Mode 3.20 23.03.2023 Demo - kaspule.app

Display: **FAIL**

Test file: kaspule Data file: None  
 Step: 6 of 6 Store: All results  
 Quantity: 5 Test file: None  
 Failures: 4 Adapter file: None

Measuring Results

Step	Description	Low-Limit	Result	High-Limit	Status
1	L1	512.56 µH	533.769 µH	600 µH	PASS
1	L1	6.453 mOhm	10.168 mOhm	12.6 mOhm	PASS
2	L1	512.56 µH	598.769 µH	600 µH	PASS
3	Ratio	0.9 T	1.122	1.1 T	FAIL
4	RDC L1	0.5 mOhm	3.112 mOhm	5 mOhm	PASS
5	Ratio 1:1	0.9 N	0.993	1.1 N	PASS
6	Ratio 5:5 Turns	4.5 N	5.277	5.5 N	PASS



- ◇ 8 pin, switching any pin to pin
- ◇ Kelvin analog switching
- ◇ Open/Short calibration up 1MHz
- ◇ Turn Ratio (calculate) and winding sence
- ◇ Control by USB interface
- ◇ No additional power supply
- ◇ Software MESCO VIEW, test program and result store

Support the complete range of 4300 models

◇ Wayne Kerr LCR 4310  
 ◇ Scanner SET AD-08  
 ◇ Software MESCO View  
 Complete price  
 4.600 Euro

## Specification:

Relays: AD Relay  
 Volt: 1Vac  
 Switching Time: 0.5ms

Calculation Turn Ratio and Phase test

Dimension: 180\*155\*52mm  
 Weight: 2 Kg



## Tolerance from pin to pin

C ± 100pF  
 L ± 1µH  
 RDC ± 200mΩ

## Repeat Measurement

RDC ± 5mΩ  
 L ± 100nH

## Connections:

USB

**SET Skiba GmbH**, Hönnetalstr. 58, D-58802 Balve  
 Tel. +49 (0)2375 9381464, Fax +49 (0)2375 9381466  
 info@setskiba.de www.SETSkiba.de